

**S** smartwares®



**800**  
LUMEN

Total  
Lumen



USB-C cable  
100 cm included



Magnet



Foldable



Rechargeable  
battery




## LED rechargeable worklight

EN LED rechargeable worklight DE LED wiederaufladbarer Scheinwerfer FR Projecteur rechargeable LED NL LED oplaadbare werkklamp  
ES Luz de trabajo LED recargable IT Lampada da lavoro ricaricabile a LED SV uppladdningsbar led arbetslampa PL ledowe akumulatorowe światło robocze SK Dobijateľné pracovné LED svietidlo CZ Nabíjecí pracovní LED svítidlo BG Акумулаторна работна LED лампа LT Užlādējama LED darba gaismā

FCL-80141

EU address:	UK address:
smartwares Europe	smartwares Safety and Lighting Ltd.
Swaardvenstraat 65 5048 AV Tilburg The Netherlands	West Point, Second Floor Mucklow Office Park Mucklow Hill Halesowen West Midlands, B62 8DY United Kingdom
www.smartwares.eu	

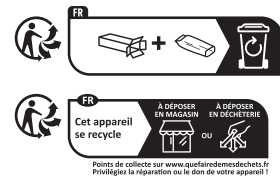



on/off  
 1x 100%  
 2x 50%  
 3x 25%  
 4x RED 100%  
 5x RED flash  
 6. White point light  
 7. Off

## RECHARGING



### CHARGING TIME



3-4 hrs

### LIGHTING TIME



3-7 hrs




POWER INPUT: DC 5V, 1A	INDOOR USE	ACCU INTEGRATED Lithium batt. 3.7V 2000mAh
COOL WHITE	RA>70	0s
LED 1X3W COB 1X1W LED	RETRACTABLE HOOKS	BATTERY INDICATOR
10.000 H	ON OFF 10.000X	ON/OFF SWITCH
800 TOTAL LUMEN	400 USEFUL LUMEN	IP20 IP RATING
BEAM ANGLE 120°	100 CM USB CABLE	DIMMABLE



- GB Protection class 3: the fitting is suitable only for low voltage: e.g. 12V.
- NL Beschermklasse 3: het armatuur is uitsluitend geschikt voor laag spanning bv.12V.
- D Schutzklam 3: die Armatur eignet sich ausschließlich für Niederspannung z.B.12V.
- F Classe de sécurité 3: l'armature est uniquement conçue pour basse tension par ex.12V.
- ES Protección de Clase 3: el montaje solo es apto para baja tensión: Ej.12V.
- IT Classe di protezione 3: la lampada è adatta solo per la bassa tensione (per esempio 12V).
- SV Skyddsclass 3: armaturen är endast lämpad för lågsänning: t.ex. 12V.
- PL Klasa zabezpieczenia 3: urządzenie może być zasilane tylko niskimi napięciami: np.12V.
- BG Клас на защита 3: фитингът е подходящ само за ниско напрежение: напр. 12V.
- LT 3. aizardzibas klase: armatūra ir piemērota tikai zemspriegumam, piemēram 12 V.
- SL Triada ochrany 3: montaž je vhodná len pre nízke napätie: napr. 12 V.
- CZ Třída ochrany 3: vybavení je vhodné pouze pro nízké napětí, např. 12 V.

0,12 kg

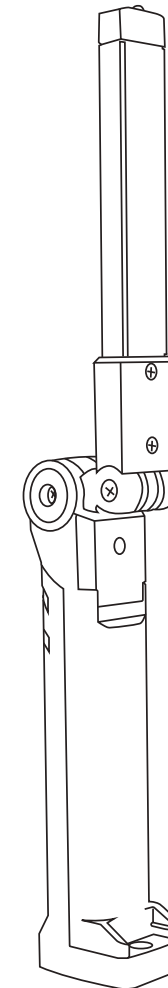

148 mm

36 mm